

## Default settings on the duplicator:

**Copy** – set to copy system and file. This is for drives that have the following file system: NTFS, FAT/16/32, eXFAT, HFS, EXT3/4 or XFS. For other file systems and boot drives, you may need to change the setting to WHOLE MEDIA

**Performance** – set to SPEED for best performance. May encountered compatibility issue with certain SSD. Should that occur, try to change the setting to BALANCE or COMPATIBILITY.

**HPA** – set to SKIP.

Please review the Jasper II Duplicator user guide for all the detail settings.

## Making duplicates

Power up the unit by pressing on the ON/OFF button at the front lower right-hand corner. Once the unit is ready, the LCD should display

### HDD Duplicator

#### 1. Copy

The unit is now ready. Simply load a source drive to the source slot (the first bay on the top) and up to three target drives to the target slots (the three lower bays). After a few seconds, the LCD should display the number of target drives detected. Press the OK button on the LCM control panel to start the copying.

Note: some drives may not be detected correctly. In that case, please leave the drive inside the unit and re-starting the duplicator.

**Addonics**  
TECHNOLOGIES

# User Guide



## Jasper II 3S2 – 1:3 2.5” HDD/SSD High Speed duplicator

Model: JD2-3SN25

## CONTACT US

**www.addonics.com**

**Phone: 408-573-8580**

**Fax: 408-573-8588**

**Email: <http://www.addonics.com/sales/query/>**

### Technical Support


If you need any assistance to get your unit functioning properly, please have your product information ready and contact Addonics Technical Support at:

**Hours: 8:30 am - 6:00 pm PST**


**Phone: 408-453-6212**

**Email: <http://www.addonics.com/support/query/>**

## Overview

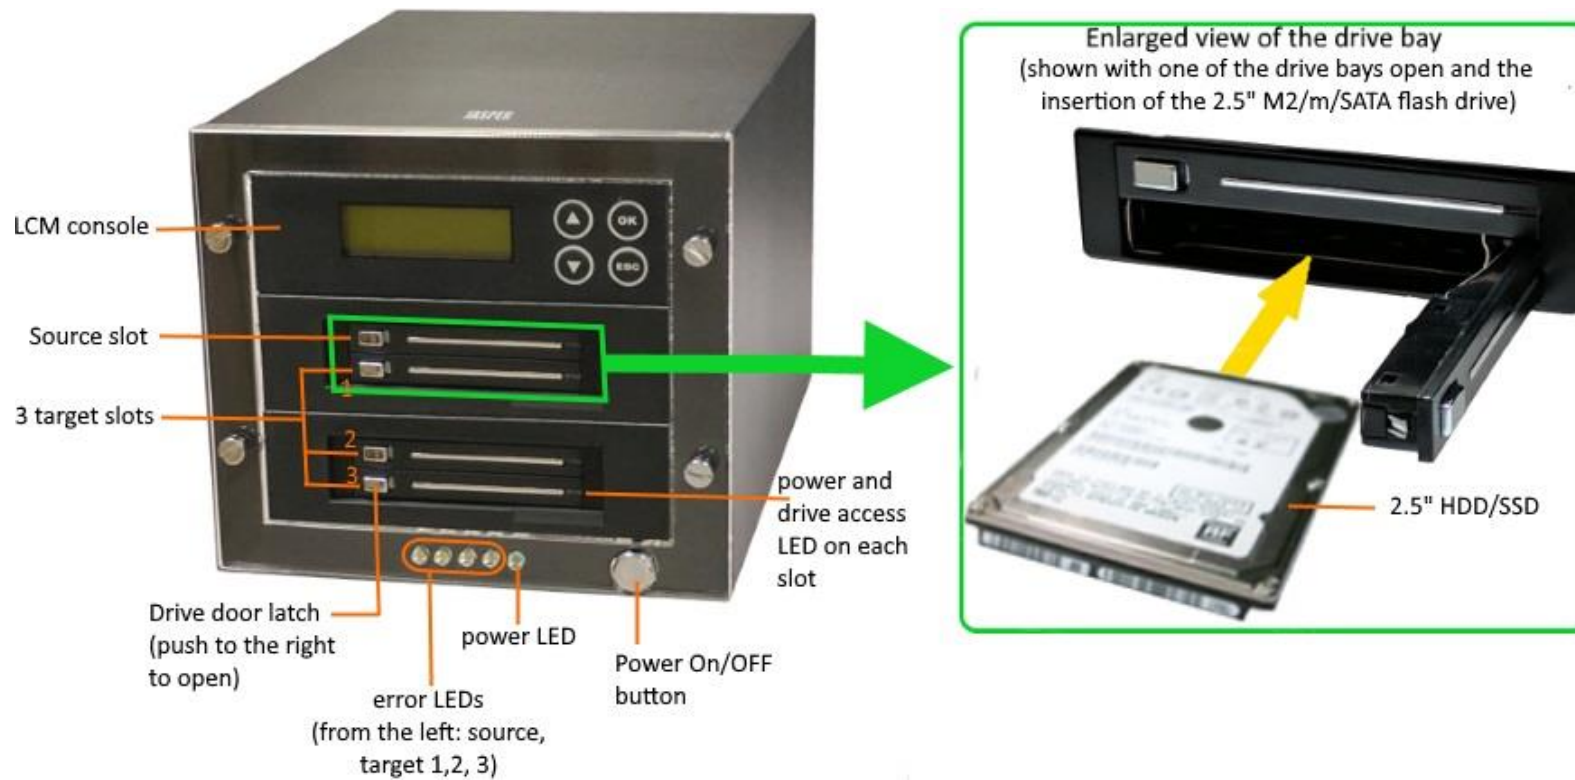

## Rear view

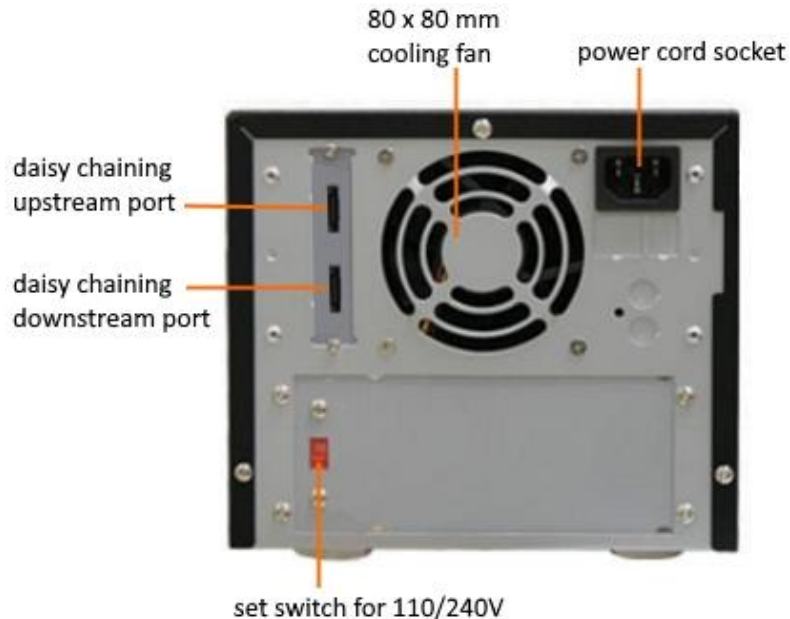

### WARNING

Be sure to set the 110/240V switch to the correct setting to your local outlet before powering on the unit. Wrong setting may cause damage to the power supply

### Package content:

- Jasper II 1:3 duplicator main unit
- One power cord
- One 12-in eSATA cable (use for daisy chaining to another Jasper II duplicator)
- This quick start user guide
- Jasper II duplicator user guide