


INTRODUCTION

The IDE/SATA/USB 2.0 internal DigiDrive is part of Addonics' advanced generation of internal Flash memory reader/writers. Designed to mount directly into a standard 3.5" drive bay, this internal DigiDrive connects to practically any flash memory media, including the latest SDHC and SDXC standards, on any system or equipment via a high speed SATA, USB or IDE interface. When connected to a SATA port, any flash media can be used as a bootable device with read/write speed of up to 150MB/sec.

This internal IDE/SATA/USB DigiDrive comes with upgradeable firmware to ensure compatibility with future Flash standards. There is also the choice of a READ only model, an ideal solution for forensic applications.

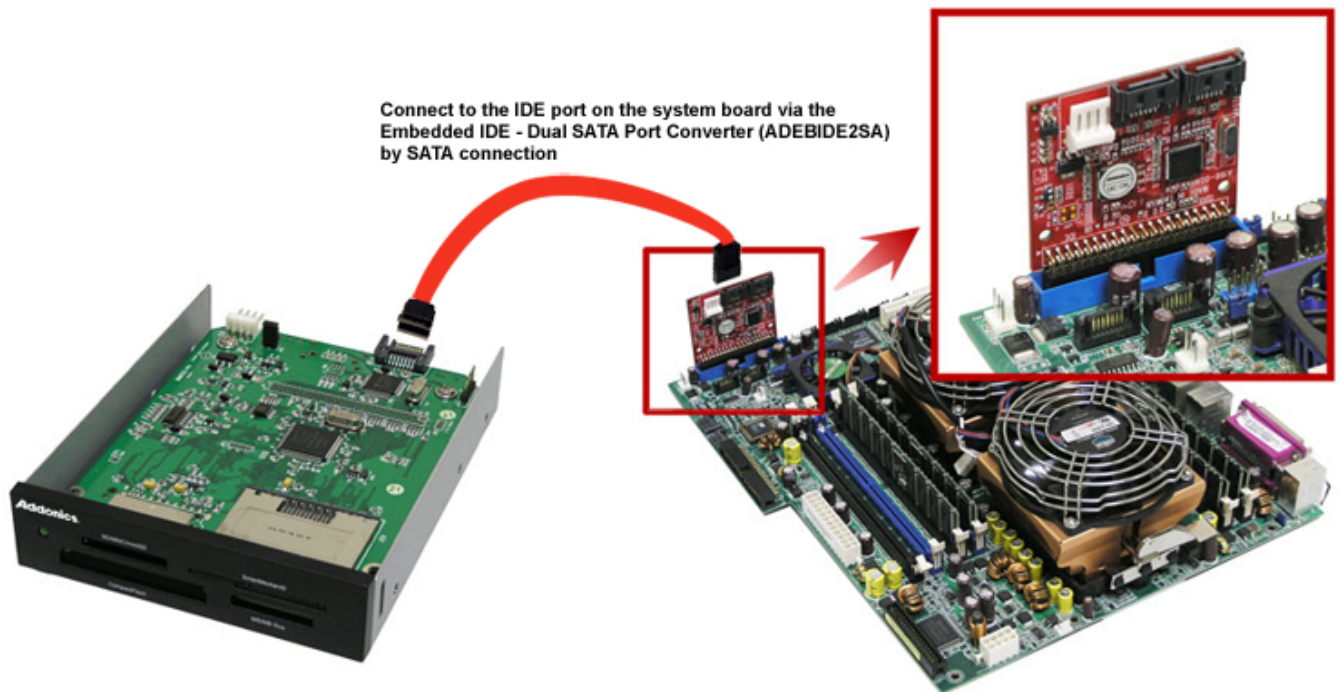

FEATURES

- High Speed SATA and USB 2.0 connection
- 4 slots for direct access of Compact Flash (CF), Secure Digital (SD) and SDHC (SD 2.0), Multi Media Card (MMC), Memory Stick (MS)
- Choice of Read/Write or READ only models
- Install into standard 3.5" drive bay
- Maximum data transfer rate (depending on the speed of the flash media):
 - SATA - up to 1500 Mbits/sec
 - USB 2.0 - up to 480 Mbits/sec
- Read and write to 15 different popular digital media (some media may require additional adapter) - Micro SD, Sony M2, Secure Digital (SD) and SDHC (SD 2.0), SDXC, mini SD, Multi Media Card (MMC & MMC Plus 4.2), Reduced Size MMC (RS-MMC)(adapter needed), Memory Stick (MS)(Magic Gate), Memory Stick Pro (MS Pro 4bit), Memory Stick Duo (MS Duo), Memory Stick Pro Duo (MS Pro Duo), Compact Flash Type I (CF I), Compact Flash Type II (CF II), MicroDrive, Smart Media, xD
- Supports hot swap of flash memory device through SATA or USB port
- Support IDE connection using the optional Addonics Embedded IDE to Dual SATA converter model: ADEDIDE2SA
- Single drive icon to access one media at a time
- upgradeable firmware to ensure future compatibility
- Green LED to indicate media access
- Backward compatible to USB 1.1
- Complete Plug and Play

SPECIFICATIONS

Interface:	eSATA and USB 2.0/1.1
Maximum Read / Write Speed:	eSATA - 1500 Mbits/sec USB 2.0/1.1 - 480 Mbits/sec/12 Mbits/sec auto sense
Supported media	Micro SD, Sony M2, Secure Digital (SD) and SDHC (SD 2.0), SDXC, miniSD, Multi Media Card (MMC & MMC Plus 4.2), Reduced Size MMC (RS-MMC)(adapter needed), Memory Stick (MS)(Magic Gate), Memory Stick Pro (MS Pro 4bit), Memory Stick Duo (MS Duo), Memory Stick Pro Duo (MS Pro Duo), Compact Flash Type I (CF I), Compact Flash Type II (CF II), MicroDrive, Smart Media, xD
Supported OS	2000, XP, Mac OS 8.6 or higher, Linux kernel 2.4 or higher
Dimensions:	4 in (W) x 5.5 in (D) x 1 in (H)
Weight:	7.6 oz (215g) (approx.)
Operating Temperature & Humidity :	0 °C to + 60 °C, 5 - 95 % RH non condensing
Storage Temperature & Humidity:	-20 °C to + 60 °C , 5 - 90% RH
Warranty:	One Year