

Addonics IDE to SD Adapter **(Model: ADIDESDB, ADIDESDW)**


Overview

The Addonics IDE to SD Adapter is an ideal solution for industrial PC, embedded system or applications that required a simple and economical bootable SD slot. Designed to connect directly to the ubiquitous IDE port, the small form factor of this IDE SD Adapter can be easily mounted inside a standard 3.5" drive bay, a PCI slot or anywhere inside the system. This Adapter is capable of booting off compatible SD, MS, MS Pro Duo, MMC, and RS-MMC cards, or simply act as a flash media card reader.

Features

- Supports Secure Digital (SD), Memory Stick (MS), Multimedia Memory Card (MMC)
- Supports both 40pin and 44pin IDE interface
- Supports DMA and Ultra DMA modes. A compatible flash media card will be required to use these modes.
- Choice of black or ivory color bay bracket
- Mount onto any standard height PCI bracket
- Mount onto standard 3.5" drive bay (or 5 1/4" drive bay with optional bay converter, AAMK53)
- Powered from 4 pin floppy connector or 44pin IDE Port
- Bootable
- Jumpers onboard for Master or Slave setting
- Compatible* with DOS, Windows 3.1, NT4, 98SE, Me, 2000 and XP, Vista, and Linux with no drivers necessary
- RoHS compliant

*Media must be in the device during boot up. Media is not hot swappable

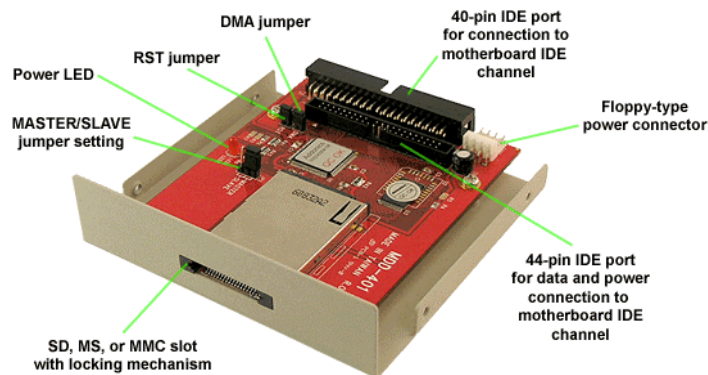

Installation:

Step 1. Connect the floppy-type power connector of the Y-type power cable (provided) to the adapter.

Step 2. Plug the 40-pin IDE ribbon cable to the 40-pin IDE port on the adapter and connect the other end to the IDE channel on the motherboard.

Step 3. Set jumper on IDE Master mode or Slave mode (JP3 ON = Master, JP3 OFF = Slave)

Important:

IDE interface cannot support hot swap. When you insert or remove the CF card, power off your system.

Contact Information

Addonics Technologies
2466 Kruse Drive
San Jose CA, 95131
Phone: 408-433-3899
Fax: 408-433-3898
Internet: <http://www.addonics.com>

Technical Support

Phone: 408-433-3855
Email: techinfo@addonics.com