

User Guide

CF or CFAST Drive (AE6CF / AE6CAS)

www.addonics.com

v3.1.11


Technical Support

If you need any assistance to get your unit functioning properly, please have your product information ready and contact Addonics Technical Support at:

Hours: 8:30 am - 6:00 pm PST

Phone: 408-453-6212

Email: <http://www.addonics.com/support/query/>

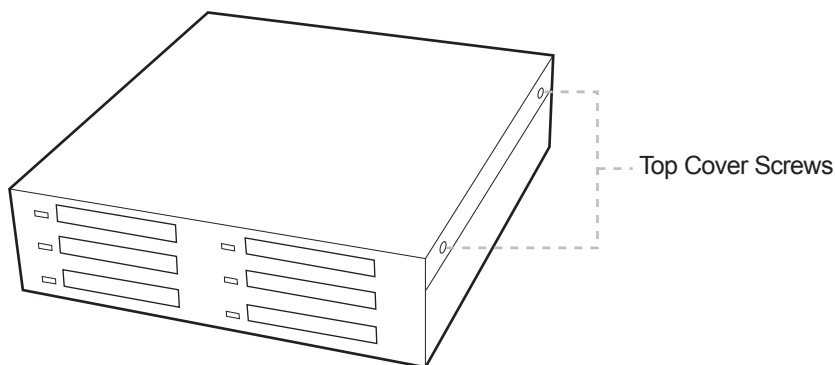

Removing Cover of CF / CFAST Drive

To remove the top cover of the CF / CFAST Drive, loosen the 4 screws located at the side of the device using a Philips screwdriver by turning counter-clockwise. Separate the metal casing of the drive from the housing by lifting up the casing.

Cable Connections

Data Cable

Each of the 6 SATA data cables will need to be connected to a SATA port.

Power Cable

Two 4-pin molex power connectors from the power supply will connect to the 4-pin molex power cable on the CF/CFAST drive. This will power all six slots on the CF/CFAST drive.

Installing CF / CFAST cards into the CF Drive

Slide the CF card into each of the slot on the CF / CFAST Drive.

Note: It is recommended to fill up the CF / CFAST Drive with CF / CFAST cards from top to bottom, left to right. This is to help in identifying which cards connect to which ports for easier troubleshooting.

CONTACT US

www.addonics.com

Phone: 408-573-8580

Fax: 408-573-8588

Email: <http://www.addonics.com/sales/query/>